
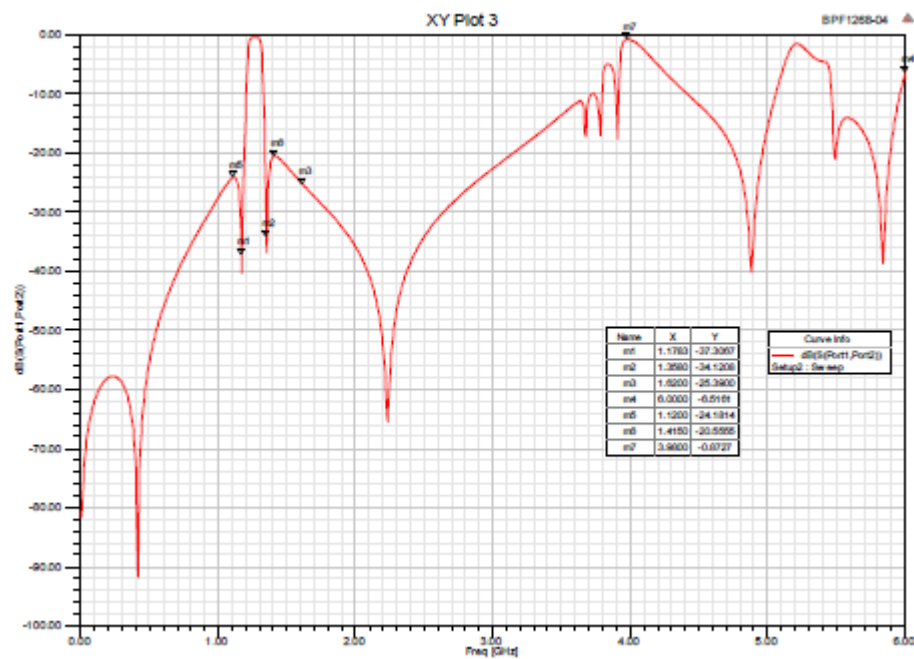


一、特性指标：


ELECTRICAL SPECIFICATIONS			
ITEM		SPEC	Unit
1	Center Frequency [fo]	1268.52	MHz
2	Bandwidth [BW1dB]	≥20.46MHz	MHz
3	Bandwidth [BW3dB]	不要求	
4	Insertion Loss in BW	≤ 0.8 (25°C) ≤ 1.2 (-55~+125)	dB
5	Ripple in BW	≤ 0.3	dB
6	V S W R	≤ 1.3	
7	Attenuation [Absolute Value]	$\geq 25@ f_c - 90\text{MHz}$; $\geq 25@ f_c + 90\text{MHz}$; $\geq 1@ f_c - 50\text{MHz}$;	dBc

		$\geq 1 @ f_c + 50\text{MHz} ;$ $\geq 20 @ DC \sim 1178.29\text{MHz} ;$ $\geq 15 @ 1358 \sim 1620\text{MHz} ;$	
8	Phase coherence	≤ 5	°
9	magnitude of consistency	≤ 0.3	dB
10	In/Out Impedance	50	Ω
11	Operation Temperature Range	-55~+125	°C
12	Size requirement (W*L*H)	6.7*8.8*3.8mm	
13	Max input power level	2	
14	Application		

二、特性图：

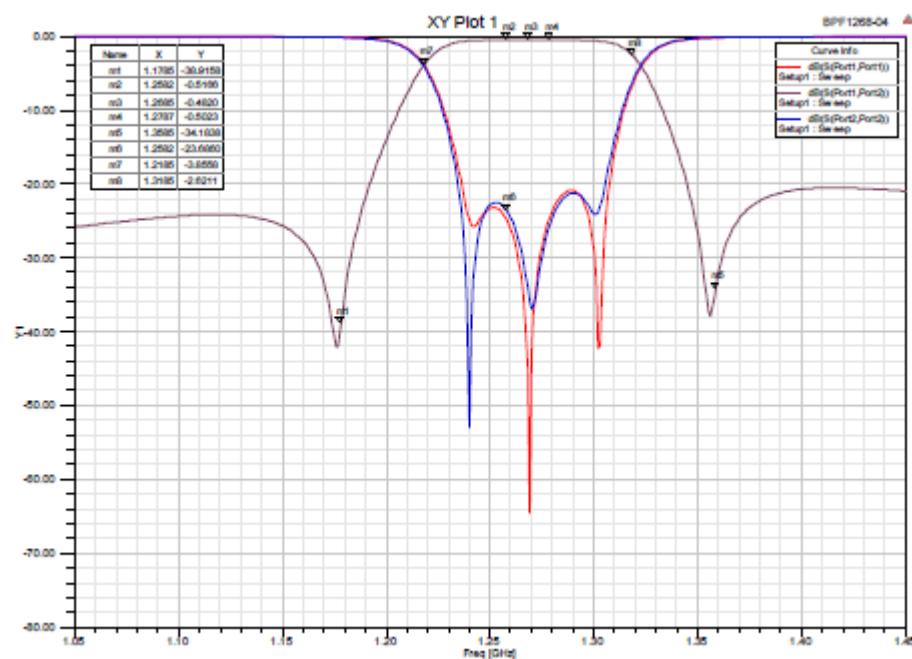

三、外观图：

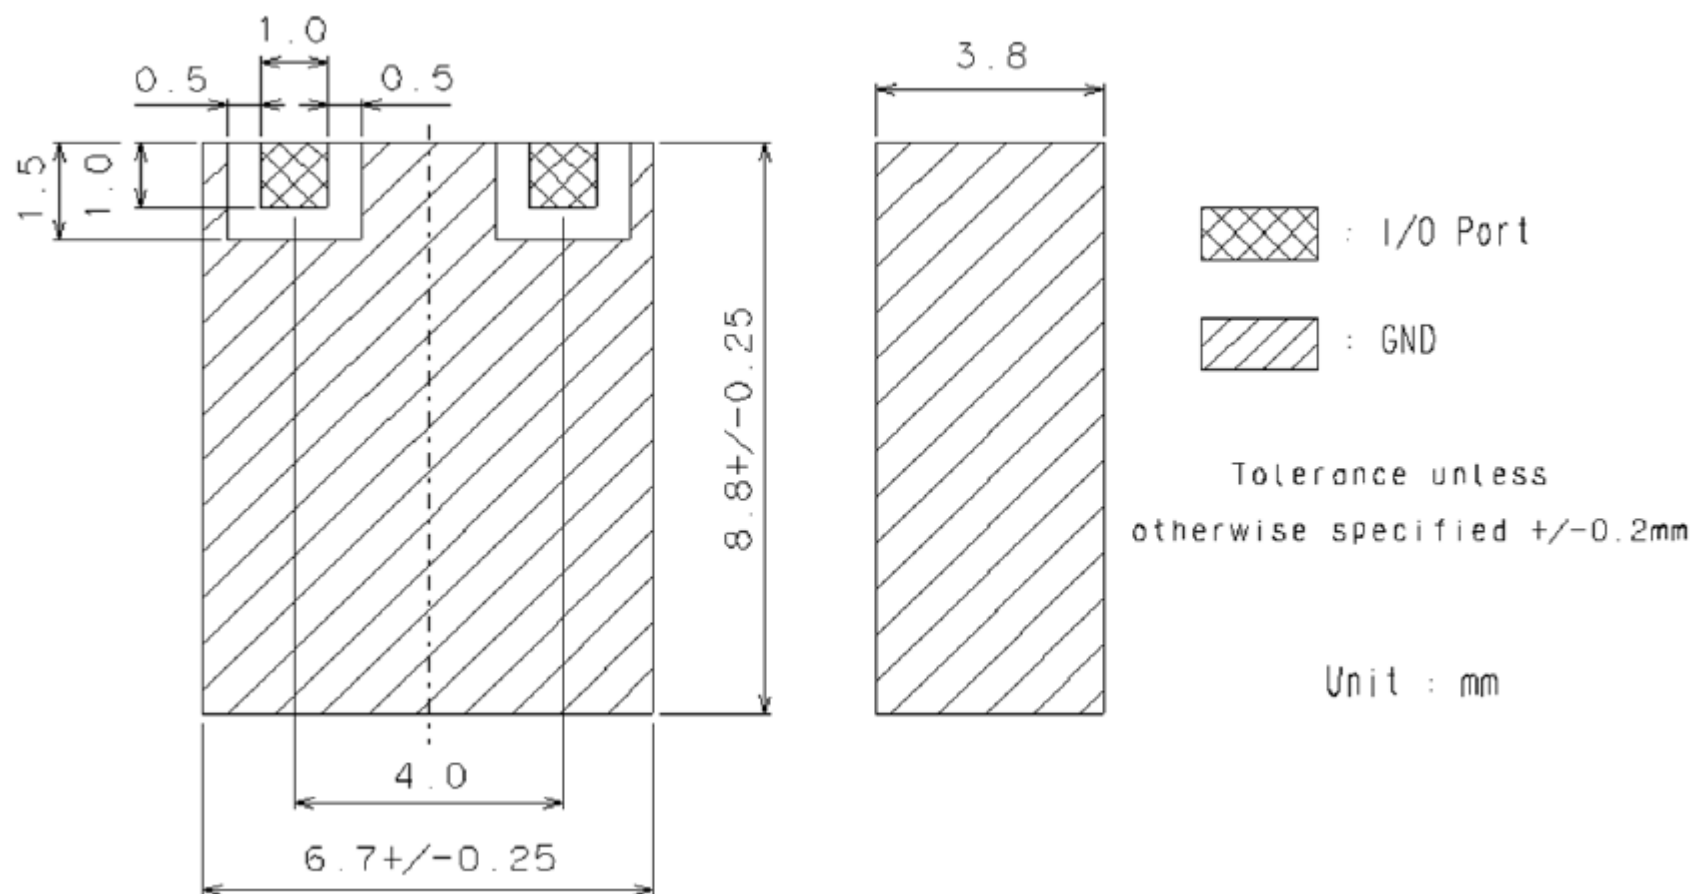

四、焊盘图：

